



## Fully Automated Beer Cave Door

Maximum Product Visibility and Easy Access


## Fully Automated Beer Cave Door

Applications

All door components are fully tested and preassembled at the factory prior to shipping. Preassembled header components mean fast, trouble-free installation at the job site.

## **Automated Beer Cave Door Features**

- Electronic eye maintains opening and closing speeds at preset distances
- Interior and exterior motion sensors ensure reliable
  motion detection
- Advanced threshold sensors provide added safety obstructions are detected and doors remain open until the threshold area is clear
- Microprocessor controller continually monitors door position
- Anthony insulated safety glass on all fixed windows and sliding doors
- Professional installation included

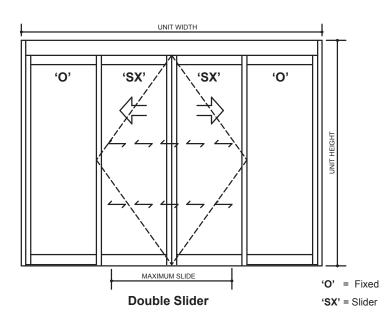


Door packages are custom manufactured to fit your job requirements. For sizes greater or smaller than typical, contact your local Anthony Sales Representative.

ABCD 03-14

Applications
Single Door Slider
Double Door Slider
Standard Features
Heated Glass
Door Locks
Header Size: 8" high x 6" deep
Typical Height: 7' 8"
Clear Door Opening: 6' 11"
Single Width: 7' to 9'
Door Opening Width: 35.5" to 47.5"
Double Width: 10' to 14'
Door Opening Width: 48" to 72"
Microprocessor Controller
Motion Sensors
Normal Temp Glass is EISA compliant
Options
Black or Satin Silver Finish
Automatic Locking System
Digital Video Camera
Mats
Wallplates
Radio Control
Reliability Features
500,000 cycle tested for wear
10-year warranted glass seal
12 months parts warranty
UL, cUL, ANSI A156.10, UBC, BOCA,

UL, cUL, ANSI A156.10, UBC, BOCA, ICBO, NFPA 101 and ADA compliant



Single Right Hand Slider (Left is Reverse)

