

Eliminaator Renu[™]
High-Efficiency, High-Style

EFFICIENCY
PAYS
FOR ITSELF
IN 2 YEARS



Open the door to Anthony
and [Contact us today!](#)



Enhanced Efficiency and Visibility




The Eliminaator Renu is Anthony's energy-efficient cooler and freezer application that eliminates heated doors, saving energy and expense. The stylish Eliminaator Renu doors offer 25% more visibility than previous models and provide optional trim rail designs that deliver a distinct refinement and contemporary aesthetic.

- Enhanced ROI in 2 years with zero-heat doors
- Zero Clear Time with Anti-Fog
- Choose from flat, curved, and decorator rails
- Retrofits made easy on Anthony frames



Eliminaator Renu™ | High-Efficiency, High-Style

Eliminaator Renu Doors provide outstanding value by increasing product visibility by 25% while incorporating energy-saving zero-heat doors into a sleek, modern design. Eliminaator Renu Doors provide efficiency, exceptional product visibility and the durability Anthony customers have come to expect.

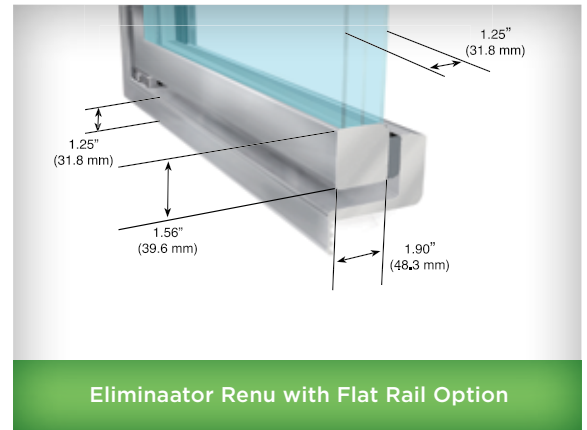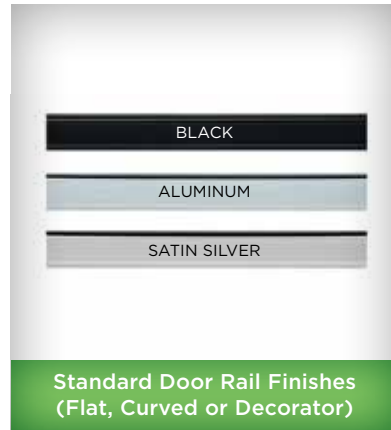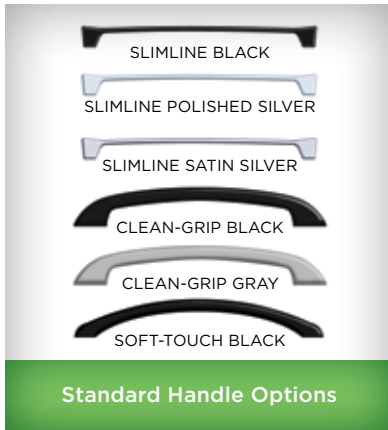

| SHELVING | SHELF DEPTH OPTIONS | | DOOR WIDTH OPTIONS | |
|--|---------------------|-----------------------|--------------------|-----|
| | INCHES | MM | INCHES | MM |
| *Standard Shelving - (Five Shelves) Doors Less Than 79" (2 m) | 24, 27, 36 | 610, 686, 914 | 24 | 610 |
| *Standard Shelving - (Seven Shelves) Doors 79" (2 m) or Taller | 24, 27, 36 | 610, 686, 914 | 26 | 660 |
| Gravity Flow Shelving (GFS) | 24, 27, 36, 42 | 610, 686, 914, 1067 | 28 | 711 |
| Gravity Flow Merchandising (GFM) | 42, 48, 60, 72 | 1067, 1219, 1524 1829 | 30 | 762 |
| Double Wide Shelving | 27, 36 | 686, 914 | | |

Custom Shelving Available
*27" (686 mm) Shelf Depth Standard

Applications:

- Cooler and Freezer
- Retrofit

Standard Features:

- Zero Heat Doors
- Multi-Pane Heat Reflective Low-e Glass
- Automatic Hold-Open
- Hinge Pin
- Torque and Sag Adjust
- Reversible Door Swing
- Magnetic Door Gaskets
- ELS (T8) Lighting
- Anti-Fog
- White or Black Shelving with Galvanized Shelf Post
- EISA Compliant

Options:

- Optimax Pro 24 LED
- Full Length Handle (not for Flat Rails)
- Electronic, Cylinder or POM Lock
- French Door Frame for Cooler Applications Only
- Extra Shelves
- Black/White Epoxy-Coated Shelf Posts

| LIGHTING | FIXTURE SIZE IN (MM) | CCT (K) | POWER (W) | ILLUMINANCE (LUX)* | UNIFORMITY** |
|-------------------------------|---|--------------|-----------------------------------|--------------------|--------------|
| Standard T-8 Fluorescent | 24, 36, 48, 60, 72 (610, 914, 1219, 1524, 1829) | 4100 | 17 - 70 | 653 | 11.3:1 |
| Optimax Pro 24 Low Power LED | 48, 54, 60, 72 (1219, 1372, 1524, 1829) | 3500 4000 | Left/Right: 7-9 Center: 14-18 | 1100 | 1.1:1 |
| Optimax Pro 24 High Power LED | 48, 54, 60, 72 (1219, 1372, 1524, 1829) | 3500 4000 | Left/Right: 9-12 Center: 18-24 | 1400 | 1.1:1 |

*60" (1524 mm) Lamp measured 4" (102 mm) from frame at door centerline
**60" (1524 mm) Fixture ratio at 4" (102 mm) from frame along vertical centerline

COMPARISON CHART:

| FEATURES: | 401 | 101 | ELIMINAATOR RENU |
|------------------------|-------|-------|------------------|
| Reversible | X | ✓ | ✓ |
| French Door Frame | X | ✓ | ✓ |
| Annual Operating Cost* | \$219 | \$166 | \$0 |

* Freezer Application, \$12 kWh Utility Rate, one 30" x 67" Door Only



To order today, go to www.anthonyintl.com or call 800-772-0900.

